


Fiscal Year 2021

Ver. 2022-01-20a

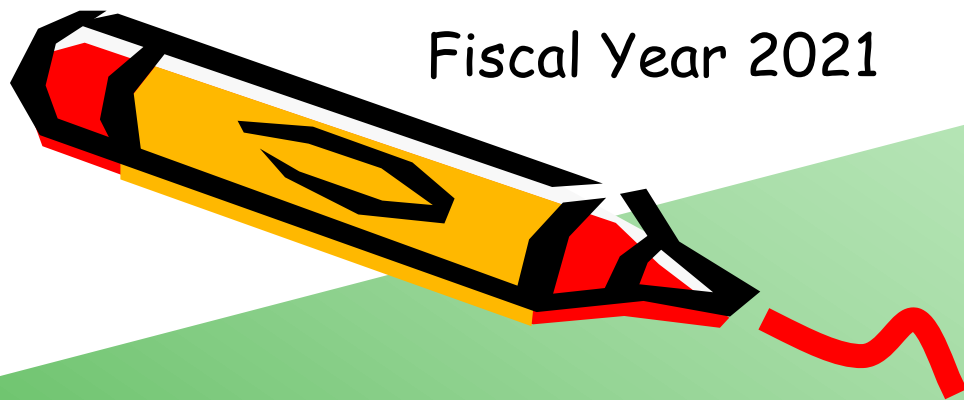

Course number: CSC.T433
School of Computing,
Graduate major in Computer Science

Advanced Computer Architecture

9. Instruction Level Parallelism: Out-of-order Execution and Multithreading



www.arch.cs.titech.ac.jp/lecture/ACA/
Room No.W936
Mon 14:20-16:00, Thr 14:20-16:00

Kenji Kise, Department of Computer Science
kise_at_c.titech.ac.jp


Exploiting Instruction Level parallelism (ILP)

- A superscalar processor has to handle some flows efficiently to exploit ILP
 - Control flow
 - To execute n instructions per clock cycle, the processor has to fetch at least n instructions per cycle.
 - The main obstacles are branch instruction (BNE, BEQ)
 - Another obstacle is instruction cache
 - Register data flow
 - **Dynamic scheduling**
 - Memory data flow






Instruction pipeline of OoO execution processor

- Allocating instructions to **instruction window** is called **dispatch**
- **Issue** or fire wakes up instructions and their executions begin
- In **commit** stage, the computed values are written back to **ROB**
- The last stage is called **retire** or graduate. The result is written back to **register file** (architectural register file) using a logical register number.

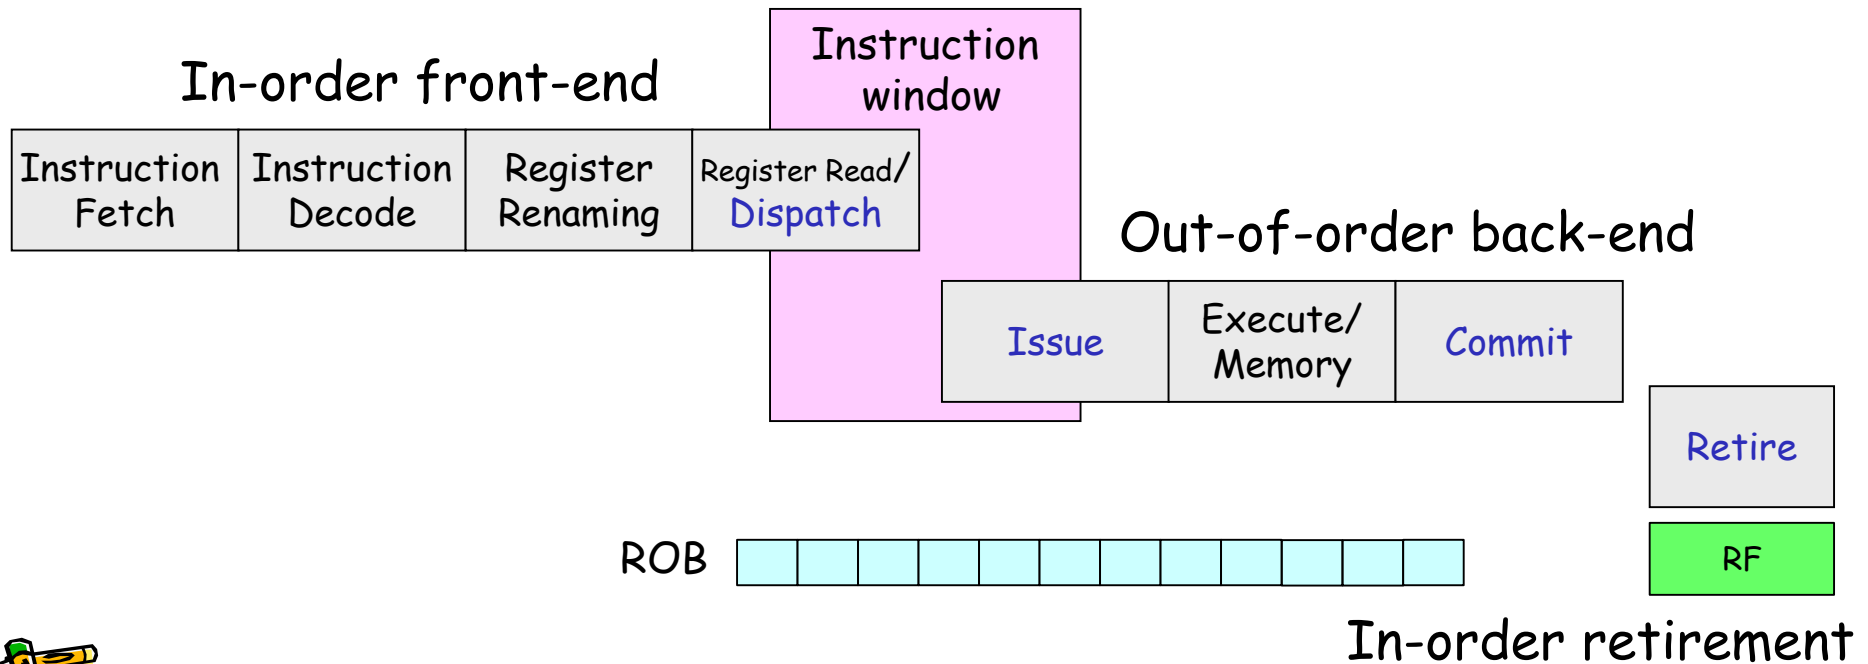

Register dataflow

- In-flight instructions** are ones processing in a processor

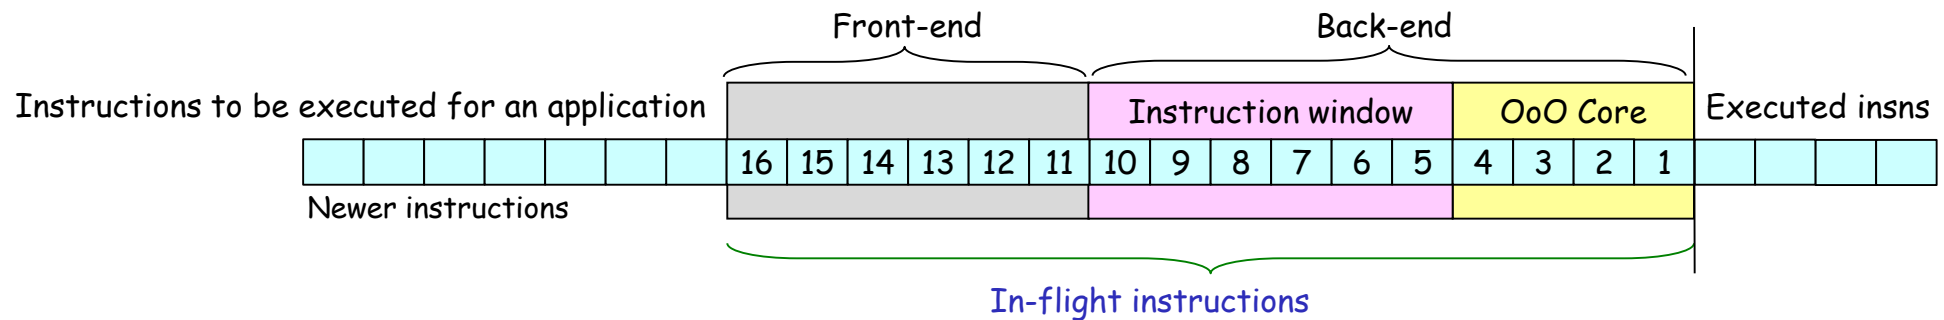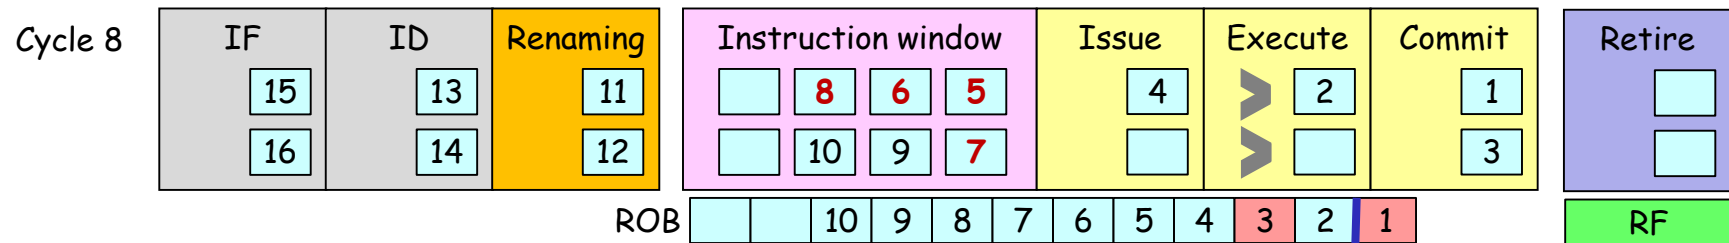


- Ia: add \$3,\$0,\$0
I1: sub p9,\$1,\$2
I2: add p10,p9,\$3
I3: or p11,\$4,\$5
I4: and p12,p10,p11



Case 1: Register dataflow from a far previous instn

- One source operand of instn I2 is from a retired instruction Ia.
- Because Ia is retired long ago, the physical destination register has been freed. The tag of the source register can not be renamed at the renaming stage for I2, still having the logical register tag \$3.
- Where does the operand \$3 of I2 come from?

Ia: add \$3,\$0,\$0
I1: sub p9,\$1,\$2
I2: add p10,p9,\$3
I3: or p11,\$4,\$5
I4: and p12,p10,p11

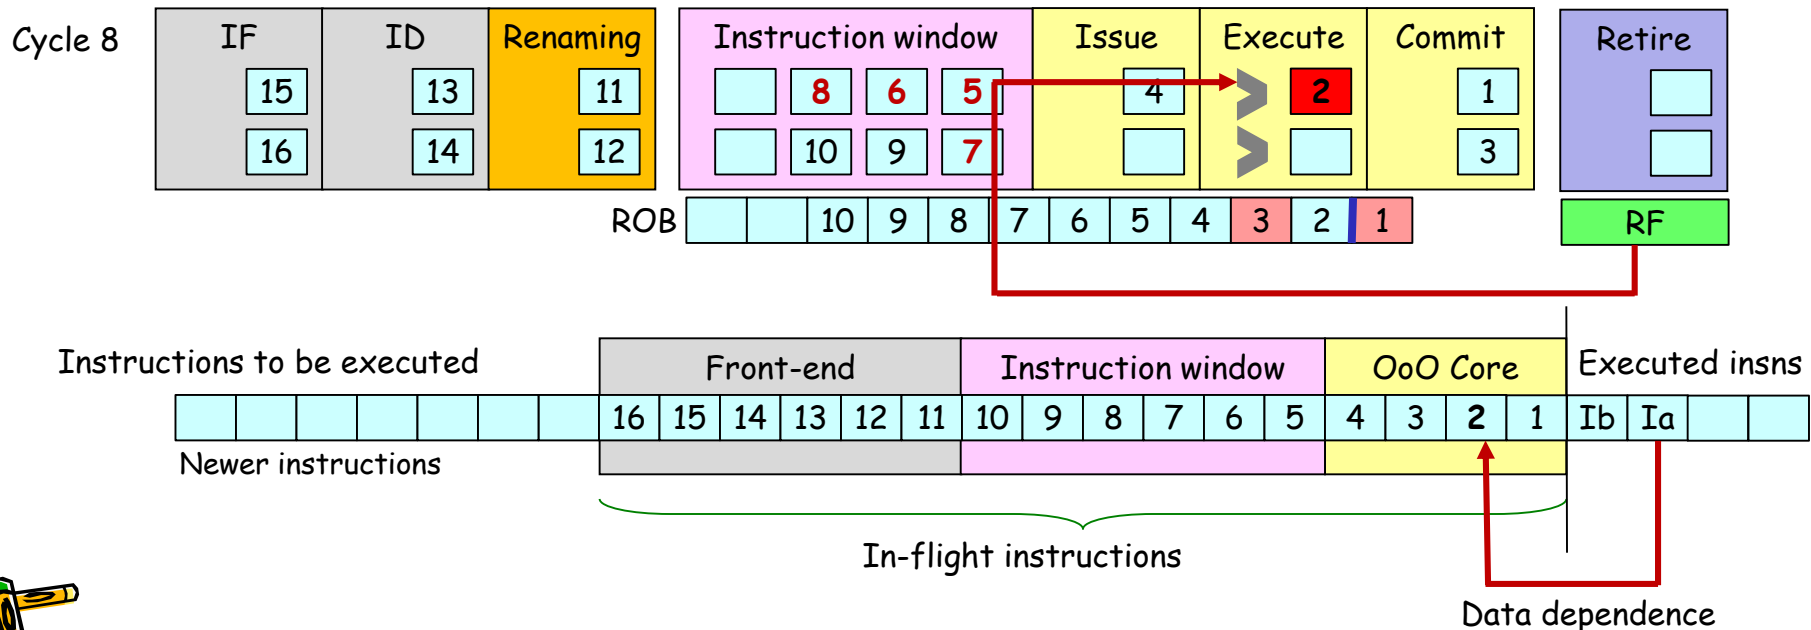

Register renaming again

- A processor remembers a set of renamed logical registers.
- If \$1 and \$2 are not renamed for in-flight instructions, it uses \$1 and \$2 instead of p1 and p2.

Cycle 1


I1: sub \$5,\$1,\$2

I2: add \$9,\$5,\$4

I3: or \$5,\$5,\$2

I4: and \$2,\$9,\$1

Free tag buffer



↑ head

dst = \$5

src1 = \$1

src2 = \$2

Register map table

0	0
1	1
2	2
3	3
4	4
5	5->9
6	6
7	7
8	8
9	
10	
31	

dst = p9

src1 = p1

src2 = p2



I1: sub p9,\$1,\$2



Case 2: Register dataflow

- Assume that one source operand **p10** of insn I5 is from I2 which is not retired. The operand is generated a few clock cycles (tens of cycles sometimes) earlier.
- Because I2 is not retired, RF does not have the operand. Because I2 is committed, the operand is stored in ROB.
- Where does the operand of I5 come from?


Ia: add \$3,\$0,\$0
 I1: sub p9,\$1,\$2
 I2: add p10,p9,\$3
 I3: or p11,\$4,\$5
 I4: and p12,p10,p11
 I5: nor p13,p10,p12

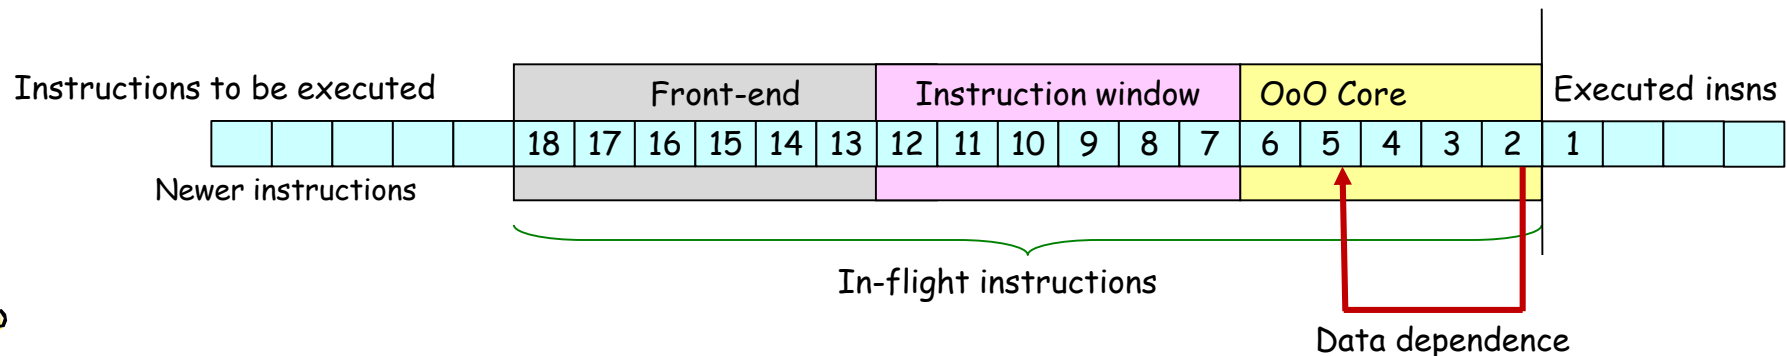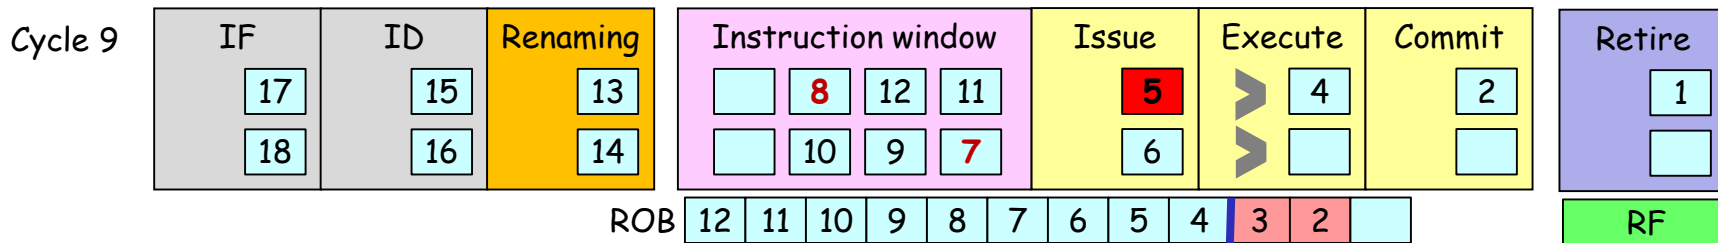

Case 2: Register dataflow from ROB

- Assume that one source operand **p10** of insn I5 is from I2 which is not retired. The operand is generated a few clock cycles (tens of cycles sometimes) earlier.
- Because I2 is not retired, RF does not have the operand. Because I2 is committed, the operand is stored in ROB.
- Where does the operand of I5 come from?



Ia: add \$3,\$0,\$0
 I1: sub **p9**,\$1,\$2
 I2: add **p10**,**p9**,\$3
 I3: or **p11**,\$4,\$5
 I4: and **p12**,**p10**,**p11**
 I5: nor **p13**,**p10**,**p12**

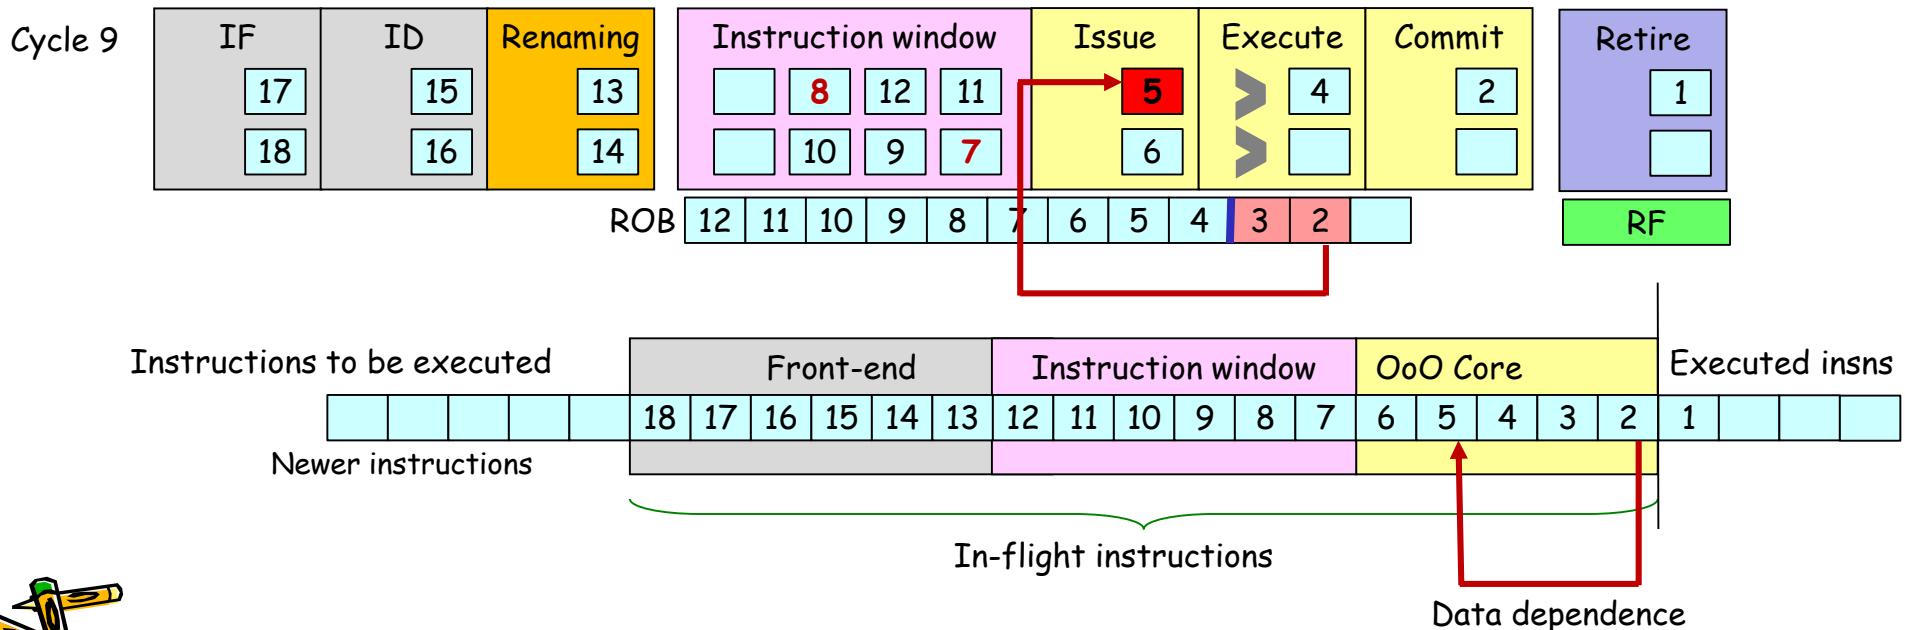

Case 3: Register dataflow

- Assume that the other source operand **p12** of insn I5 is from I4 which is not committed. The operand is generated in the previous clock cycle.
- Because I2 is not retired, RF does not have the operand.
Because I2 is not committed, ROB does not have the operand.
- Where does the operand of I5 come from?


Ia: add \$3,\$0,\$0
 I1: sub **p9**,\$1,\$2
 I2: add **p10**,**p9**,\$3
 I3: or **p11**,\$4,\$5
 I4: and **p12**,**p10**,**p11**
 I5: nor **p13**,**p10**,**p12**

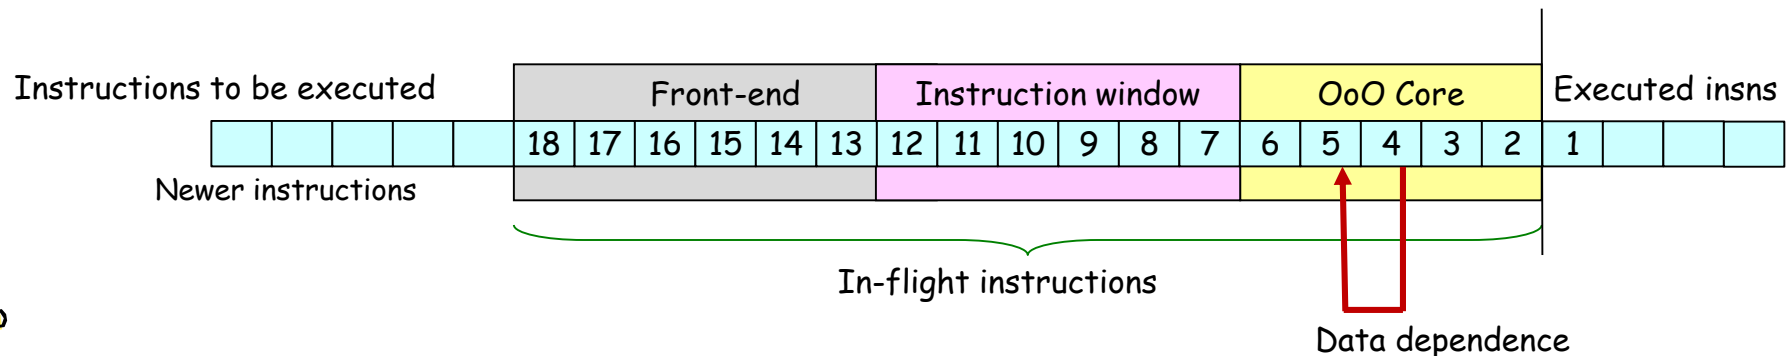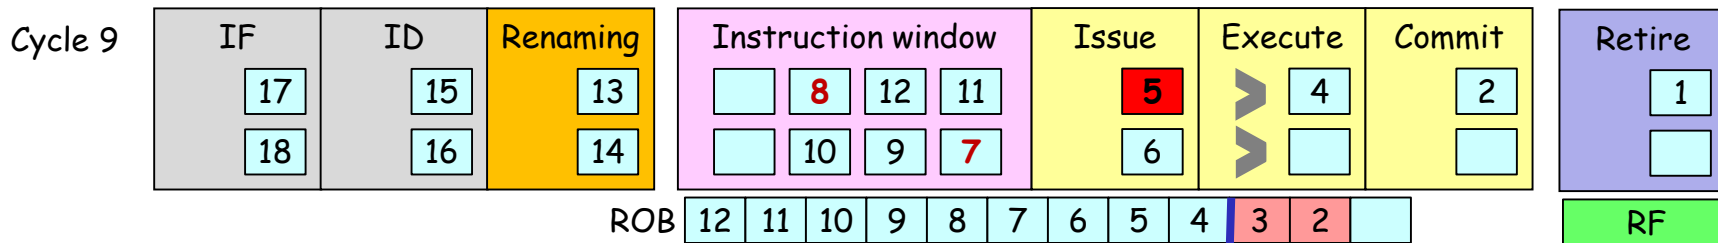

Case 3: Register dataflow from ALUs


- Assume that the other source operand **p12** of insn I5 is from I4 which is not committed. The operand is generated in the previous clock cycle.
- Because I2 is not retired, RF does not have the operand.
Because I2 is not committed, ROB does not have the operand.
- Where does the operand of I5 come from?

Ia: add \$3,\$0,\$0
 I1: sub **p9**,\$1,\$2
 I2: add **p10**,**p9**,\$3
 I3: or **p11**,\$4,\$5
 I4: and **p12**,**p10**,**p11**
 I5: nor **p13**,**p10**,**p12**

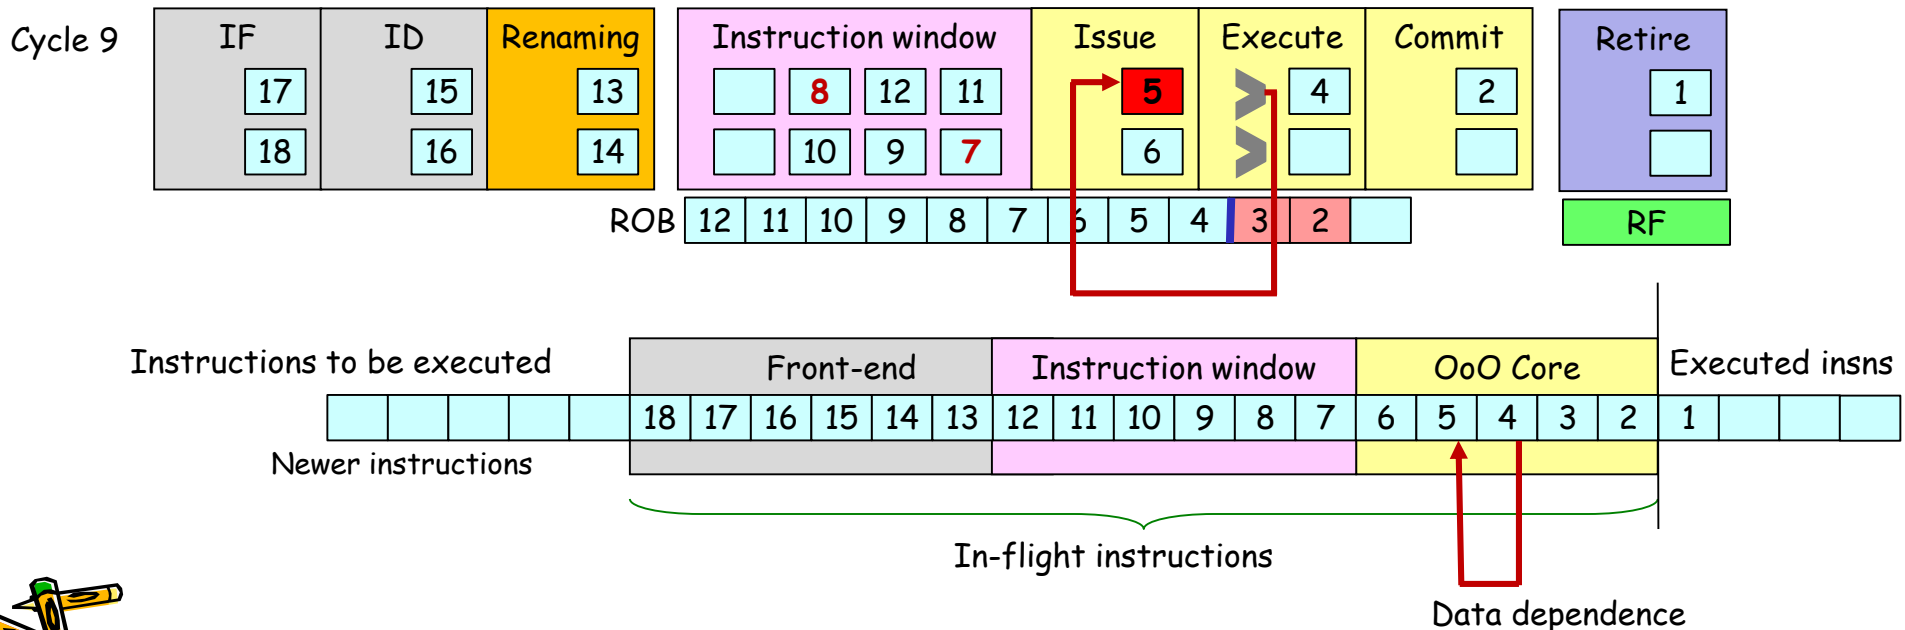


Reorder buffer (ROB), content addressable memory

- Each ROB entry has following fields
 - entry valid bit, data valid bit, data, target register number, etc.
- ROB provides **the large physical registers** for renaming
 - physical register number is ROB entry number
- The value of a physical register is from a matching ROB entry**

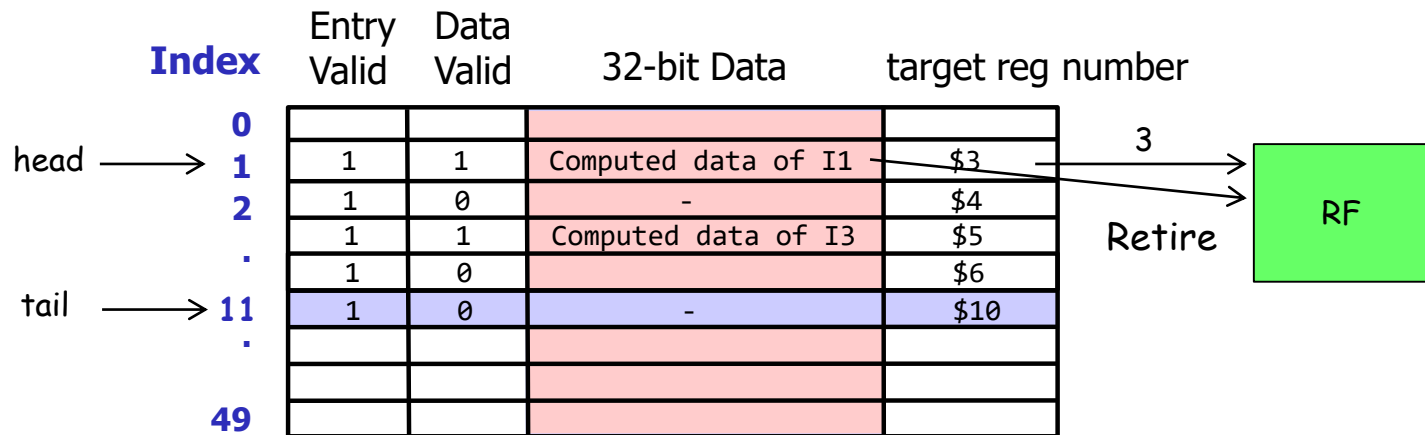


I11: add p11,p3,p8 (add \$10,\$5,\$6)

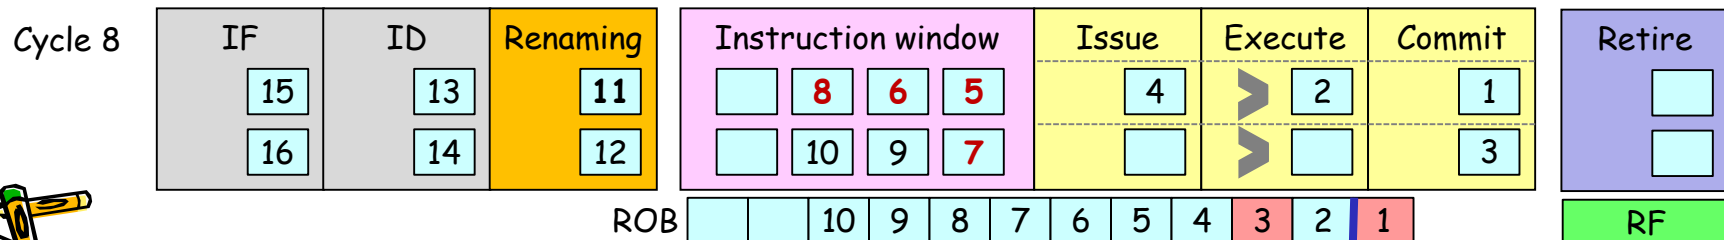




Datapath of OoO execution processor

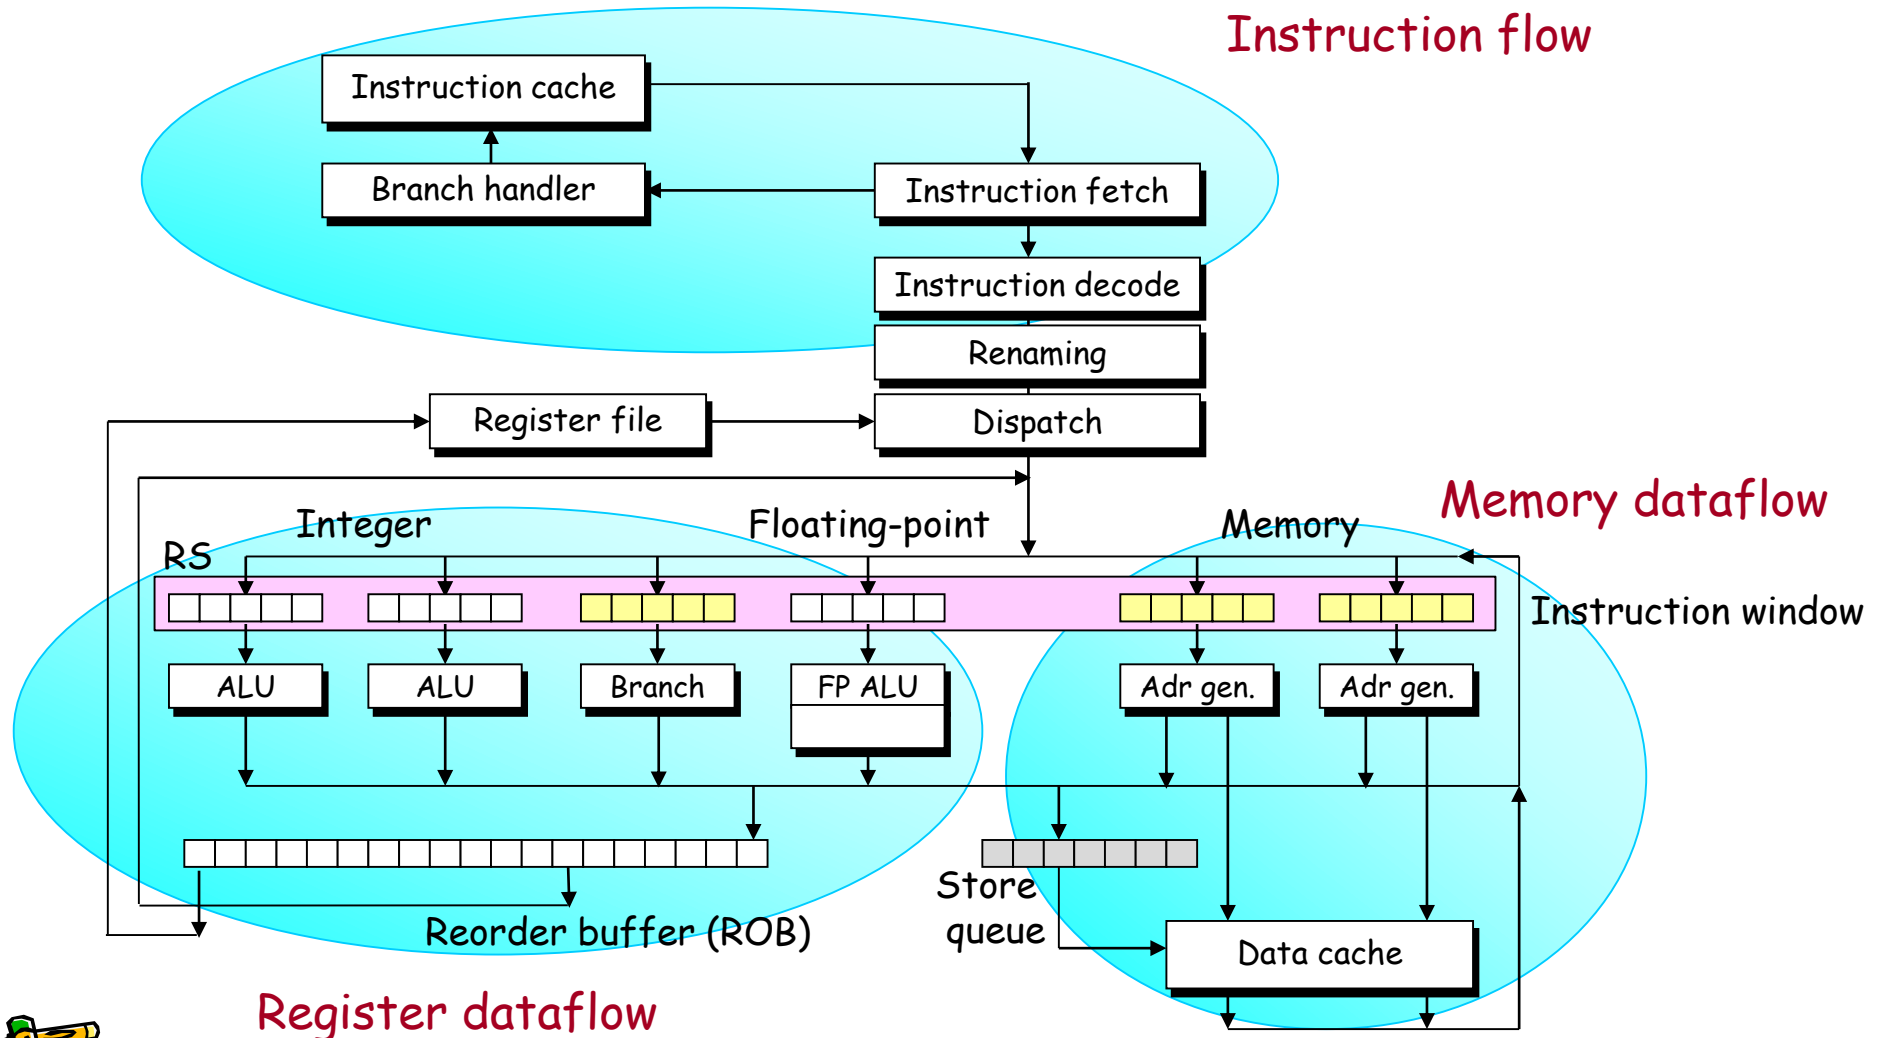

Instruction fetch unit in IF stage

- For high-bandwidth instruction delivery, prediction, and speculation

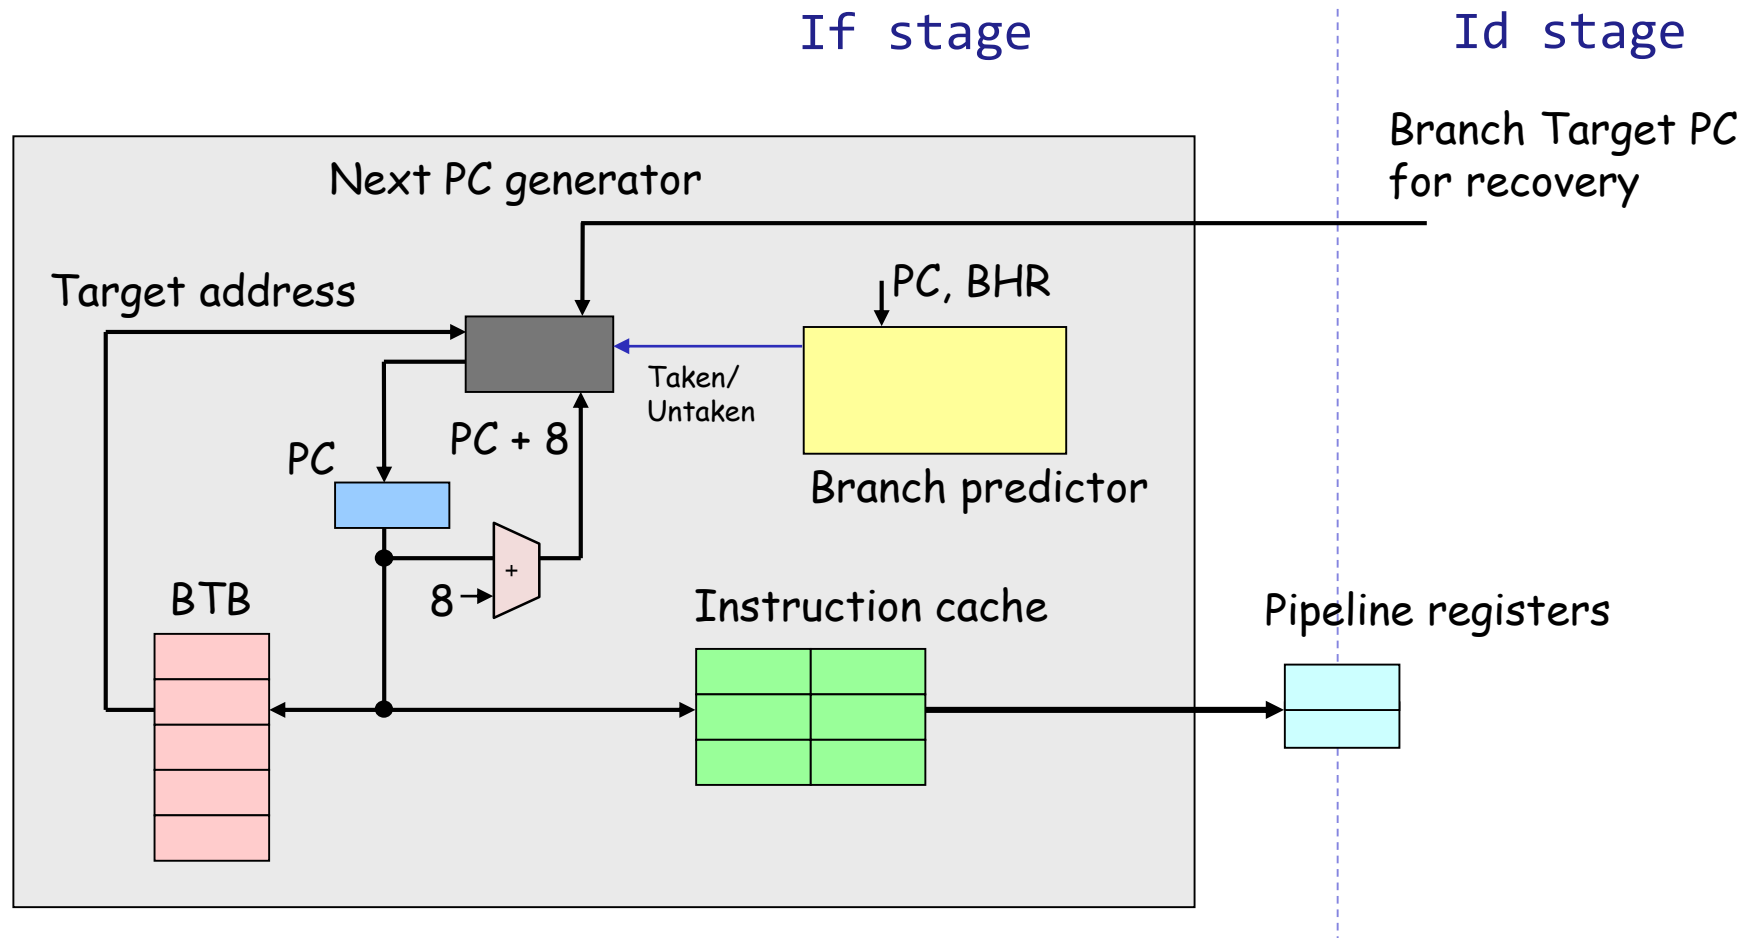

-

Cycle 1


I0: sub \$5,\$1,\$2

I1: add \$9,\$5,\$4

I2: or \$5,\$5,\$2

I3: and \$2, \$9, \$1


Free tag buffer

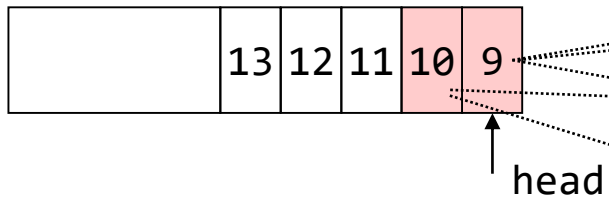

```
I0  A_dst  = $5
    A_src1 = $1
    A_src2 = $2
```

```
I1  B_dst  = $9
    B_src1 = $5
    B_src2 = $4
```


Register map table

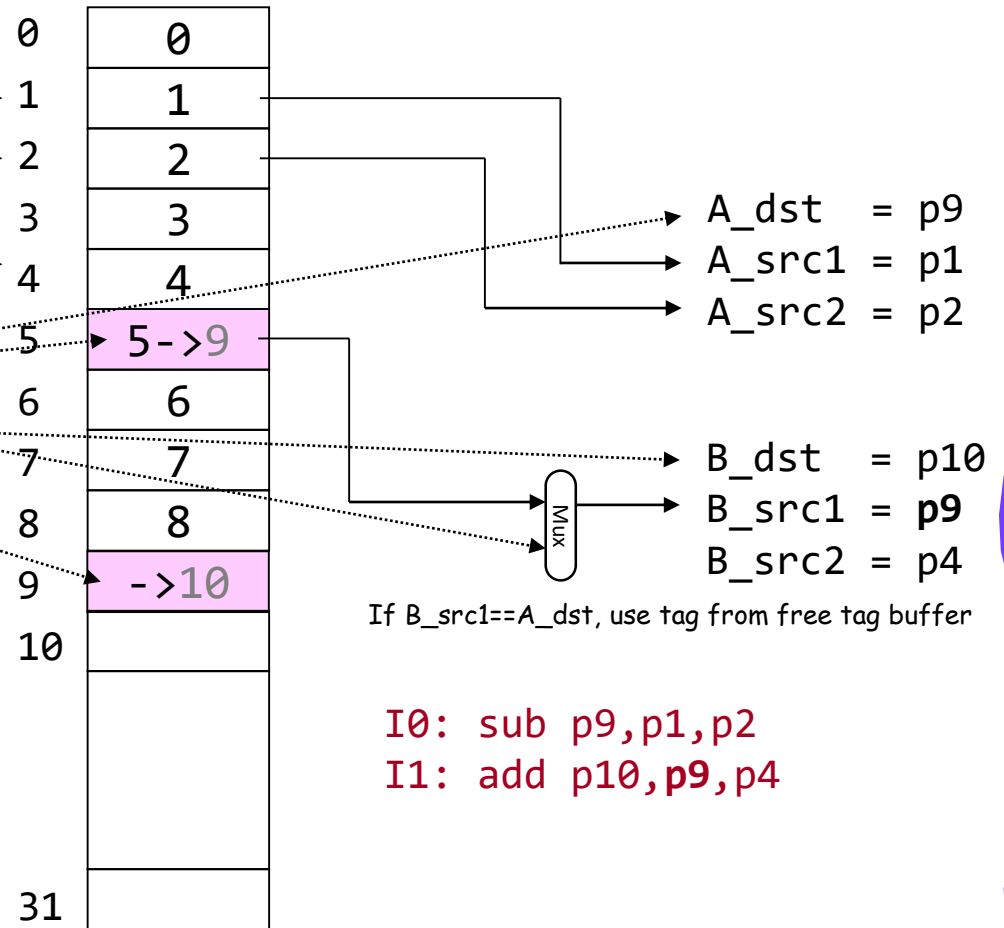

I0: sub p9,p1,p2

I1: add p10, p9, p4

Datapath of OoO execution processor (partially)

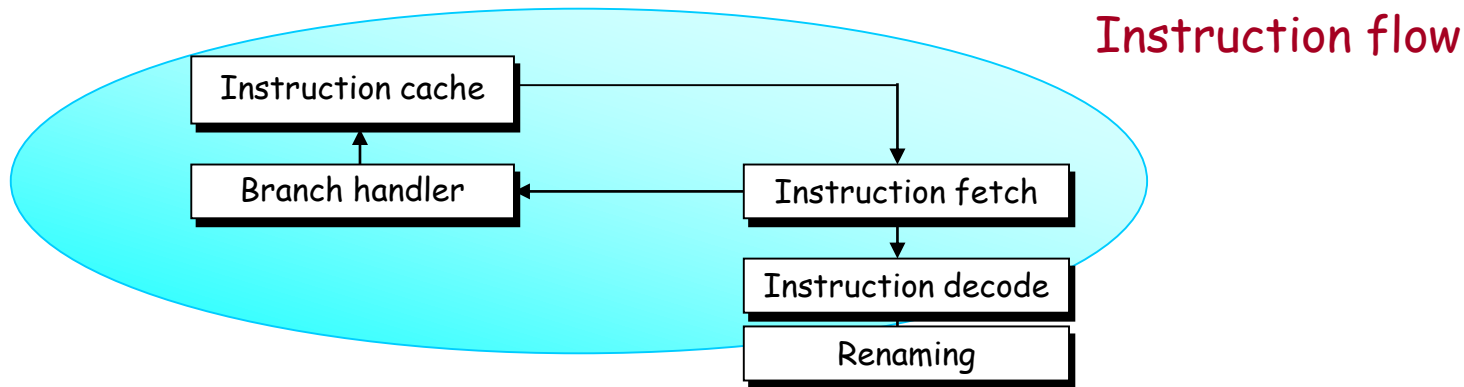


Aside: What is a window?


- A window is a space in the wall of a building or in the side of a vehicle, which has glass in it so that light can come in and you can see out. (Collins)



Instruction window			
	8	6	5
		4	7

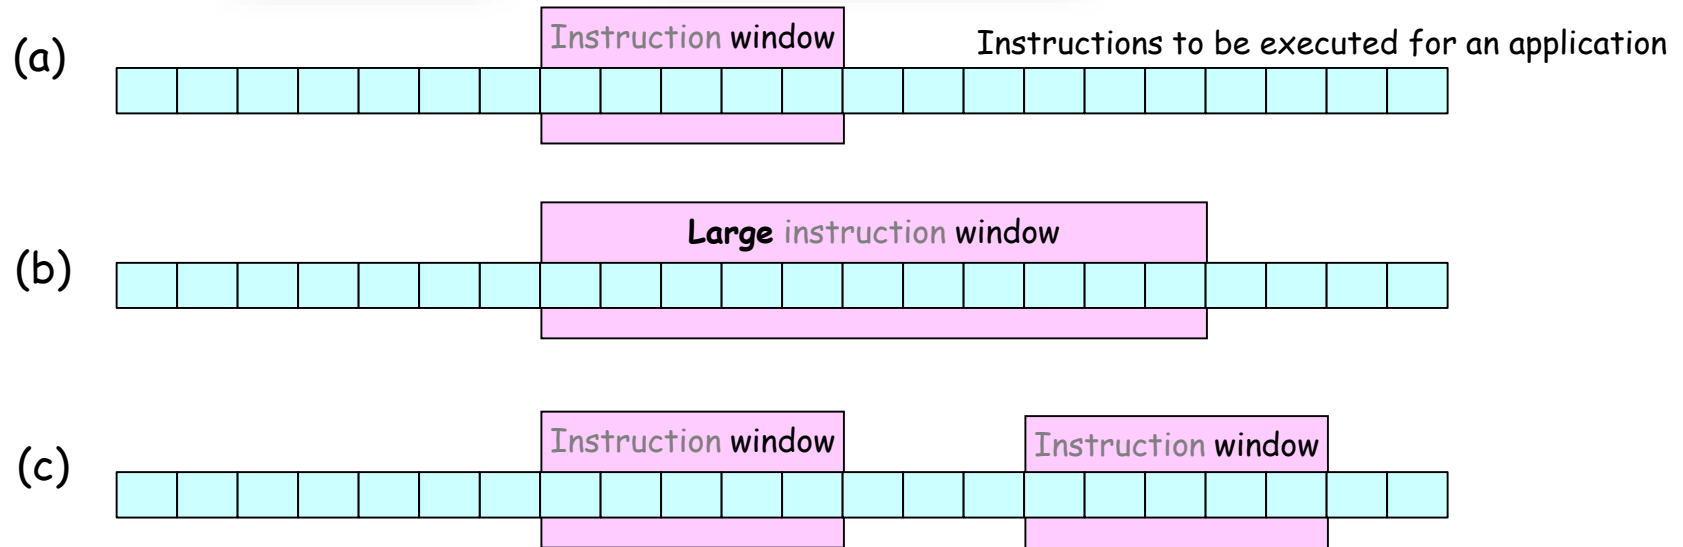

Datapath of OoO execution processor (partially)

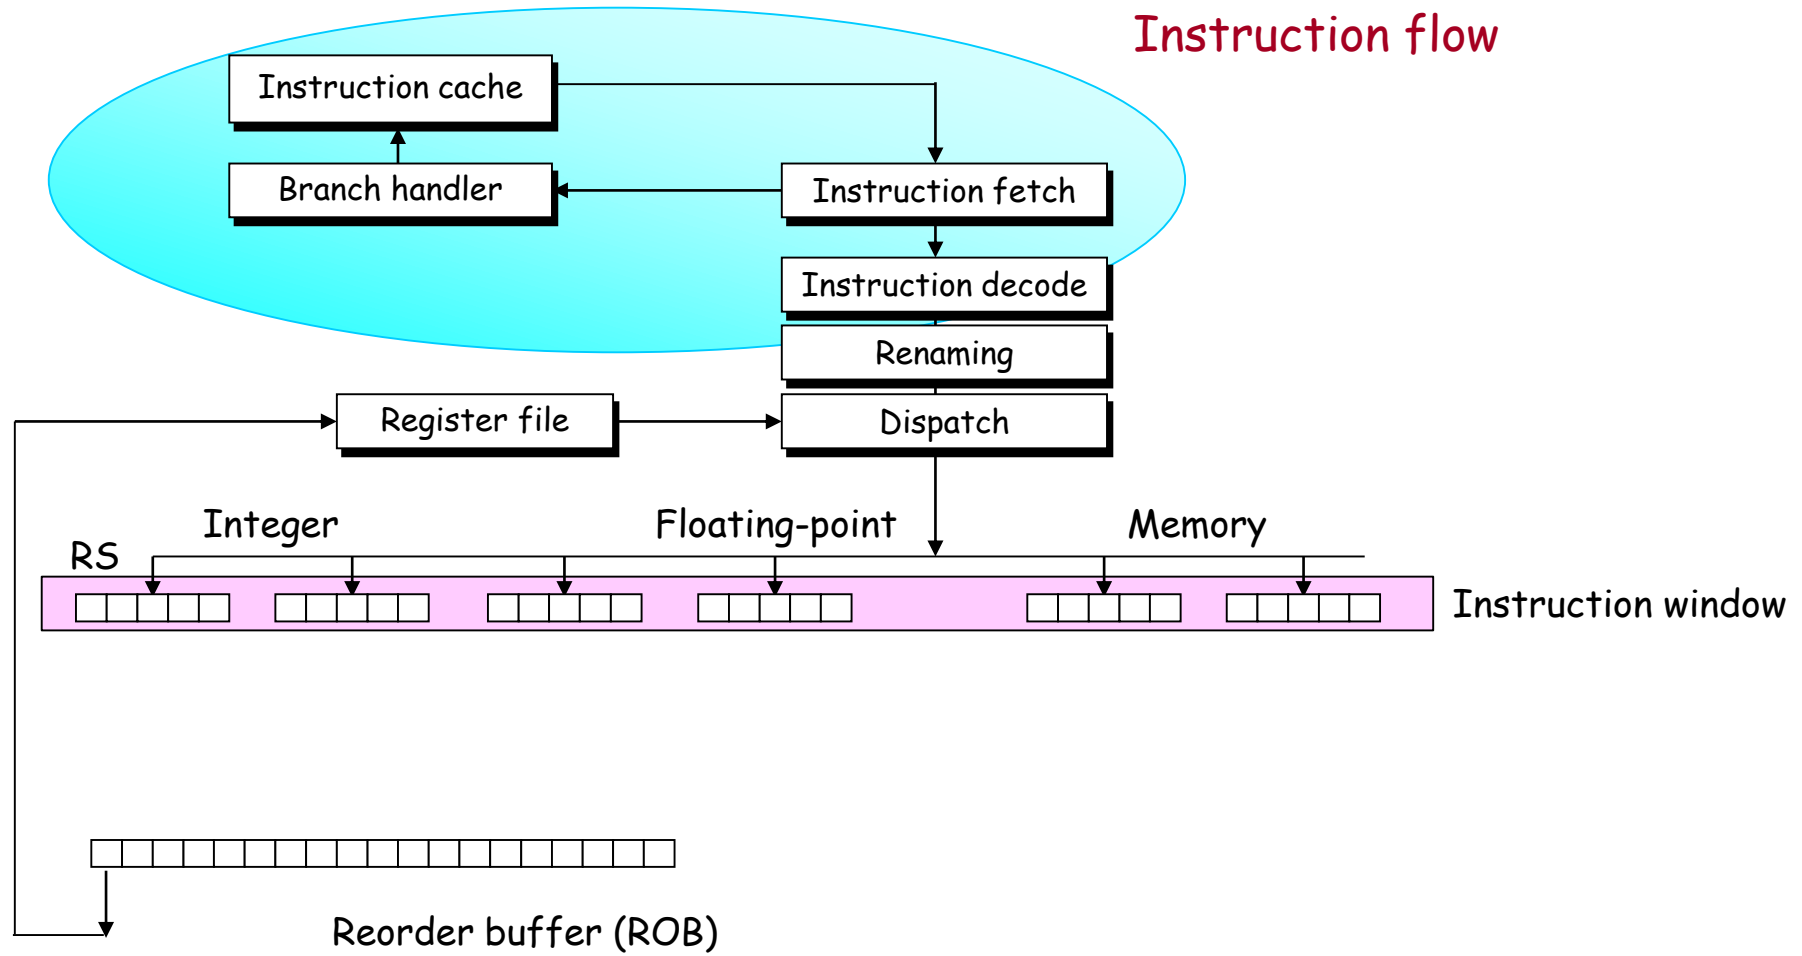


Register dataflow


Reservation station (RS)

- To simplify the wakeup and select logic at issue stage, each functional unit (ALU) has own instruction window, an entry for an instruction is called **reservation station (RS)**.
- Each reservation station has
 - valid bit, src1 tag, src1 data, src1 ready, src2 tag, src2 data, src2 ready, destination physical register number (dst), operation, ...
 - The computed data with its *dst* as tag is broadcasted to all RSs.

instruction window for ALU1 and ALU2

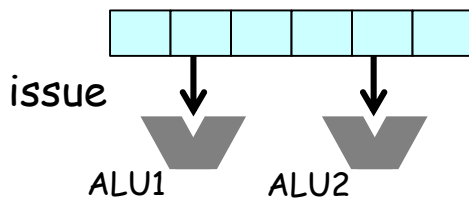


(a) Central instruction window

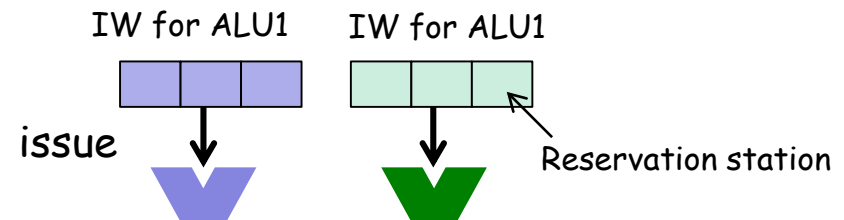

(b) instruction window using RS




Datapath of OoO execution processor (partially)

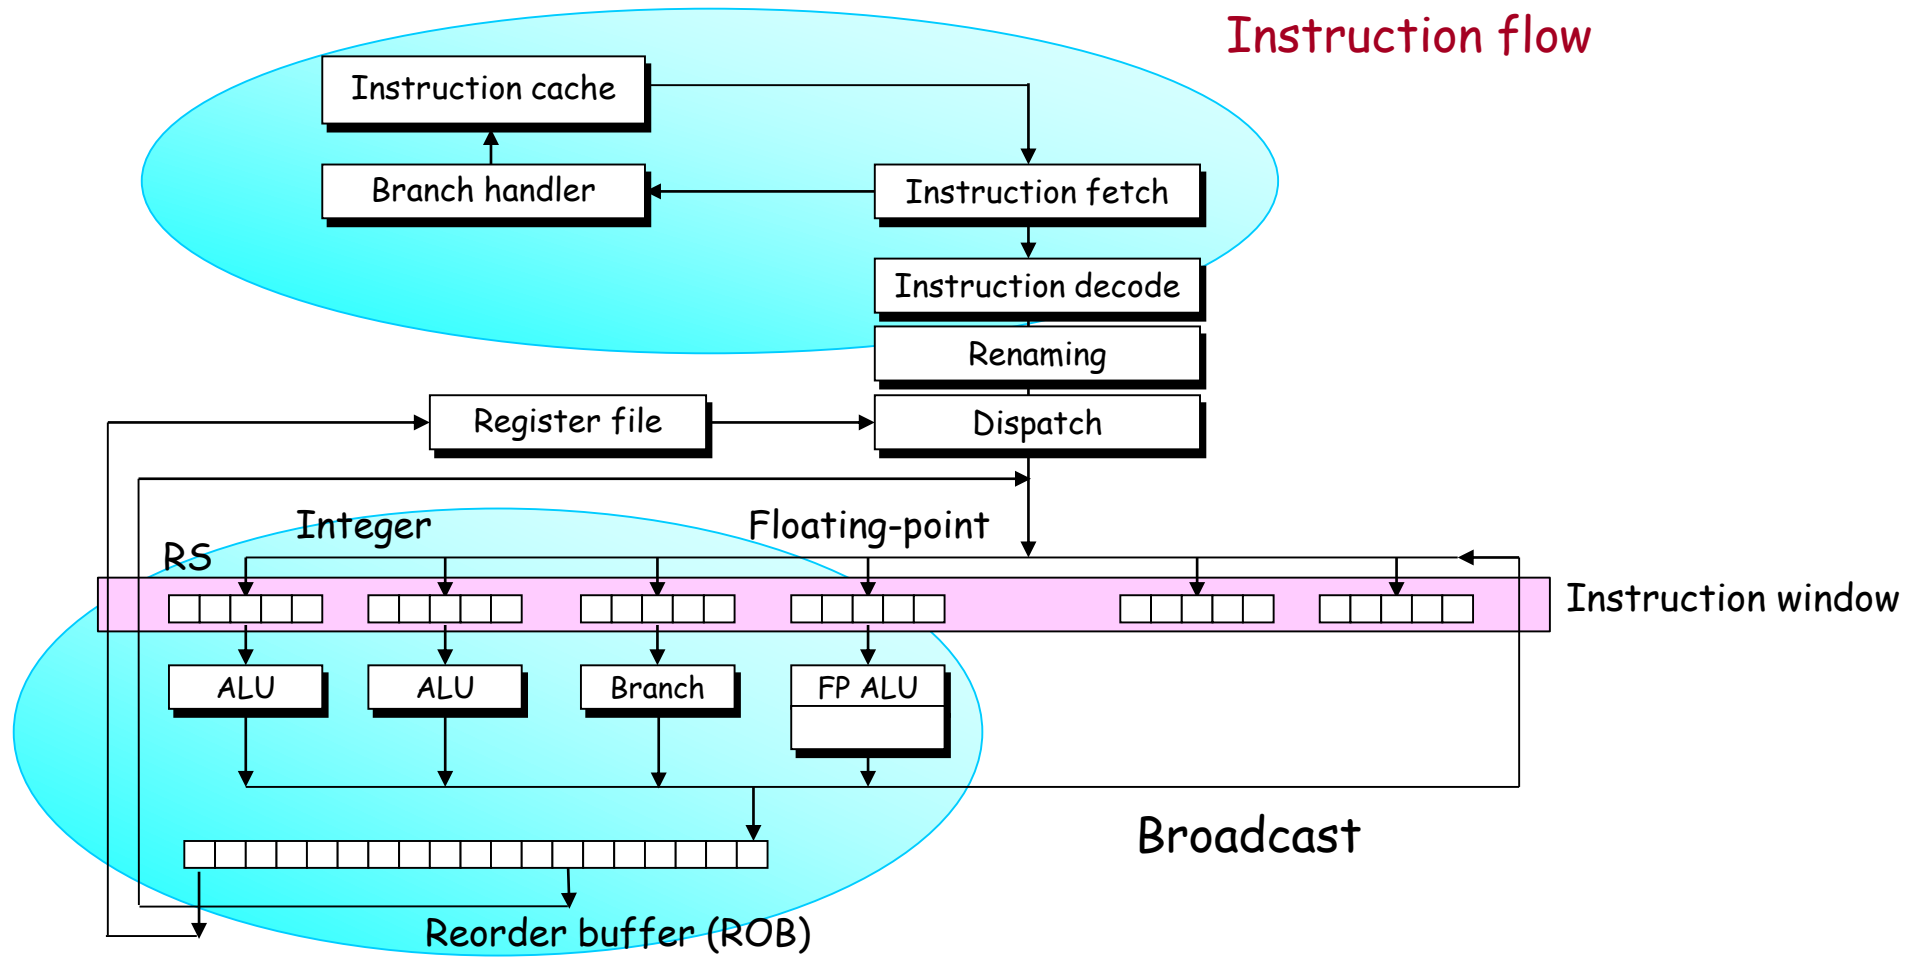


Register dataflow


Example behavior

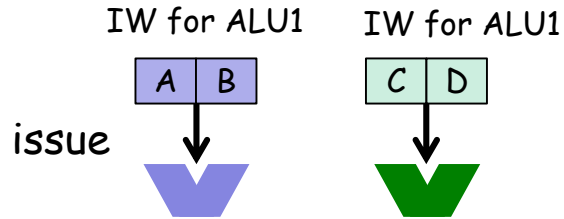


Ia: add \$3,\$0,\$0
 I1: sub p9,\$1,\$2
 I2: add p10,p9,\$3
 I3: or p11,\$4,\$5
 I4: and p12,p10,p11
 I5: nor p13,p10,p12

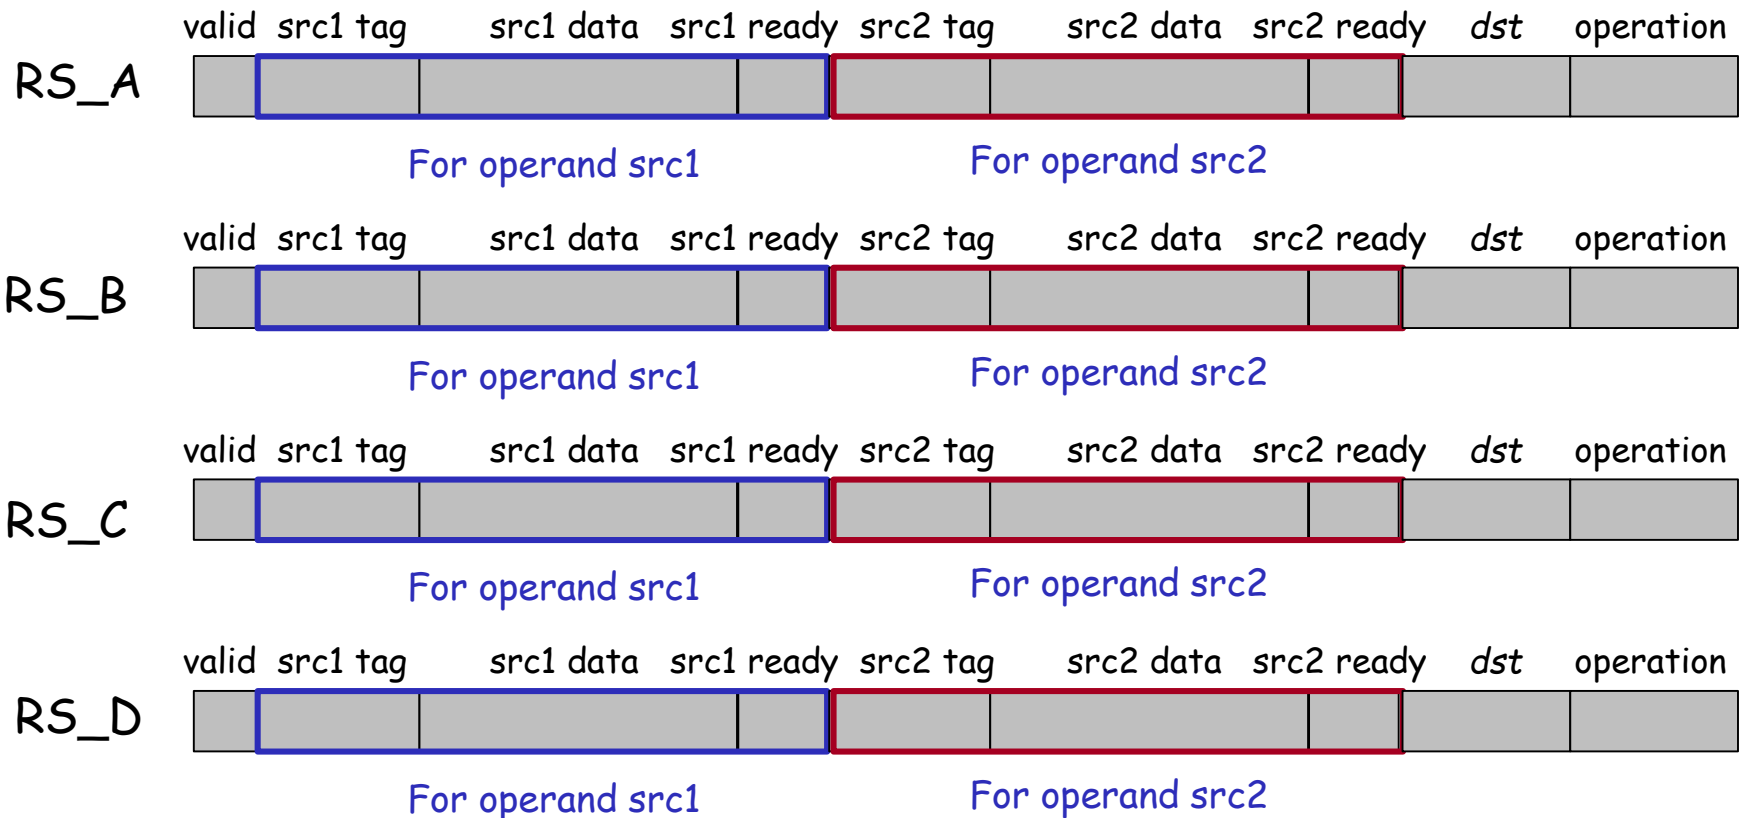

Example behavior

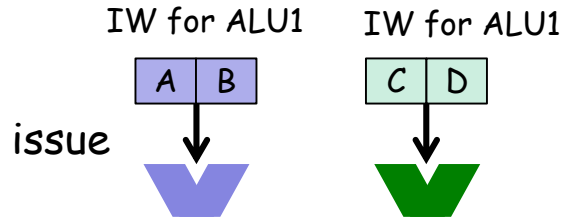

Ia: add \$3,\$0,\$0
 I1: sub p9,\$1,\$2
 I2: add p10,p9,\$3
 I3: or p11,\$4,\$5
 I4: and p12,p10,p11
 I5: nor p13,p10,p12

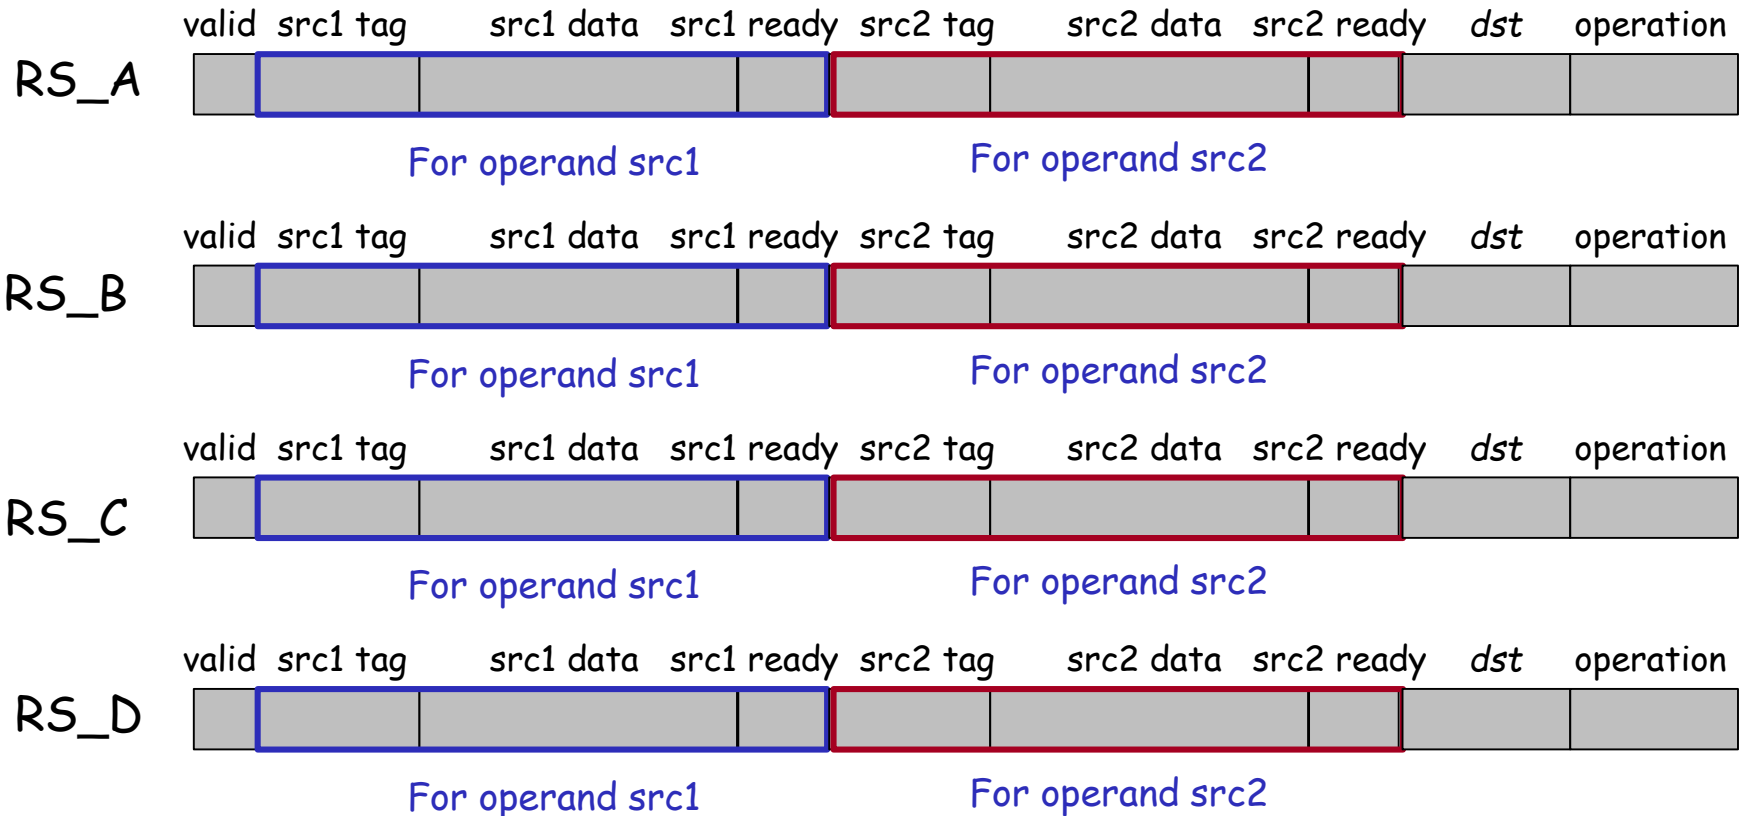




Instruction Level Parallelism (ILP)

lw	\$t0, 32(\$s3)	(1)
add	\$t0, \$s2, \$t0	(2)
sw	\$t0, 48(\$s3)	(3)
lw	\$t1, 32(\$s4)	(4)

Annotations:
- Blue arrow from (1) to (2): data dependency.
- Red arrow from (2) to (4) with a red question mark: ambiguous data dependency.

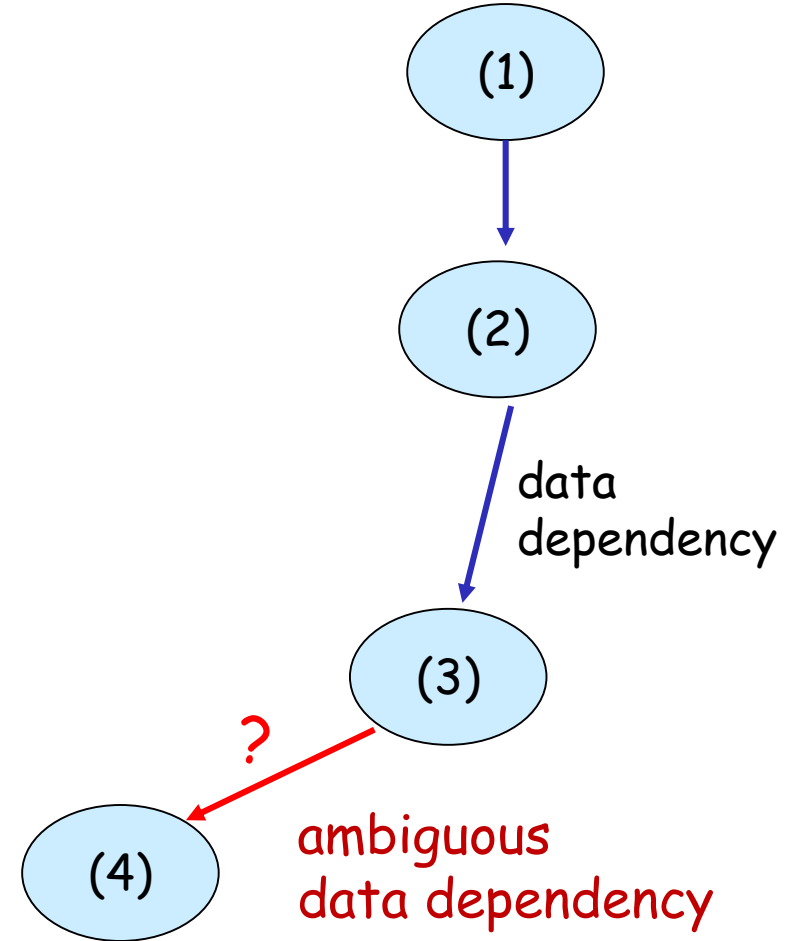

Memory dataflow and branches


- The update of a data cache cannot be recovered easily. So, **cache update is done at the retire stage** in-order manner by using **store queue**.

Because of the **ambiguous memory dependency**, **load and store instructions** can be executed in-order manner.

- About 30% (or less) of executed instructions are load and stores.
- Even if they are executed in-order, IPC of 3 can be achieved.
- **Branch instructions** are executed in-order manner.
 - About 20% (or less) of executed instructions are jump and branch instructions.
 - Out-of-order branch execution and aggressive miss recovery may cause false recovery (recovery by a branch on the false control path).



Datapath of OoO execution processor

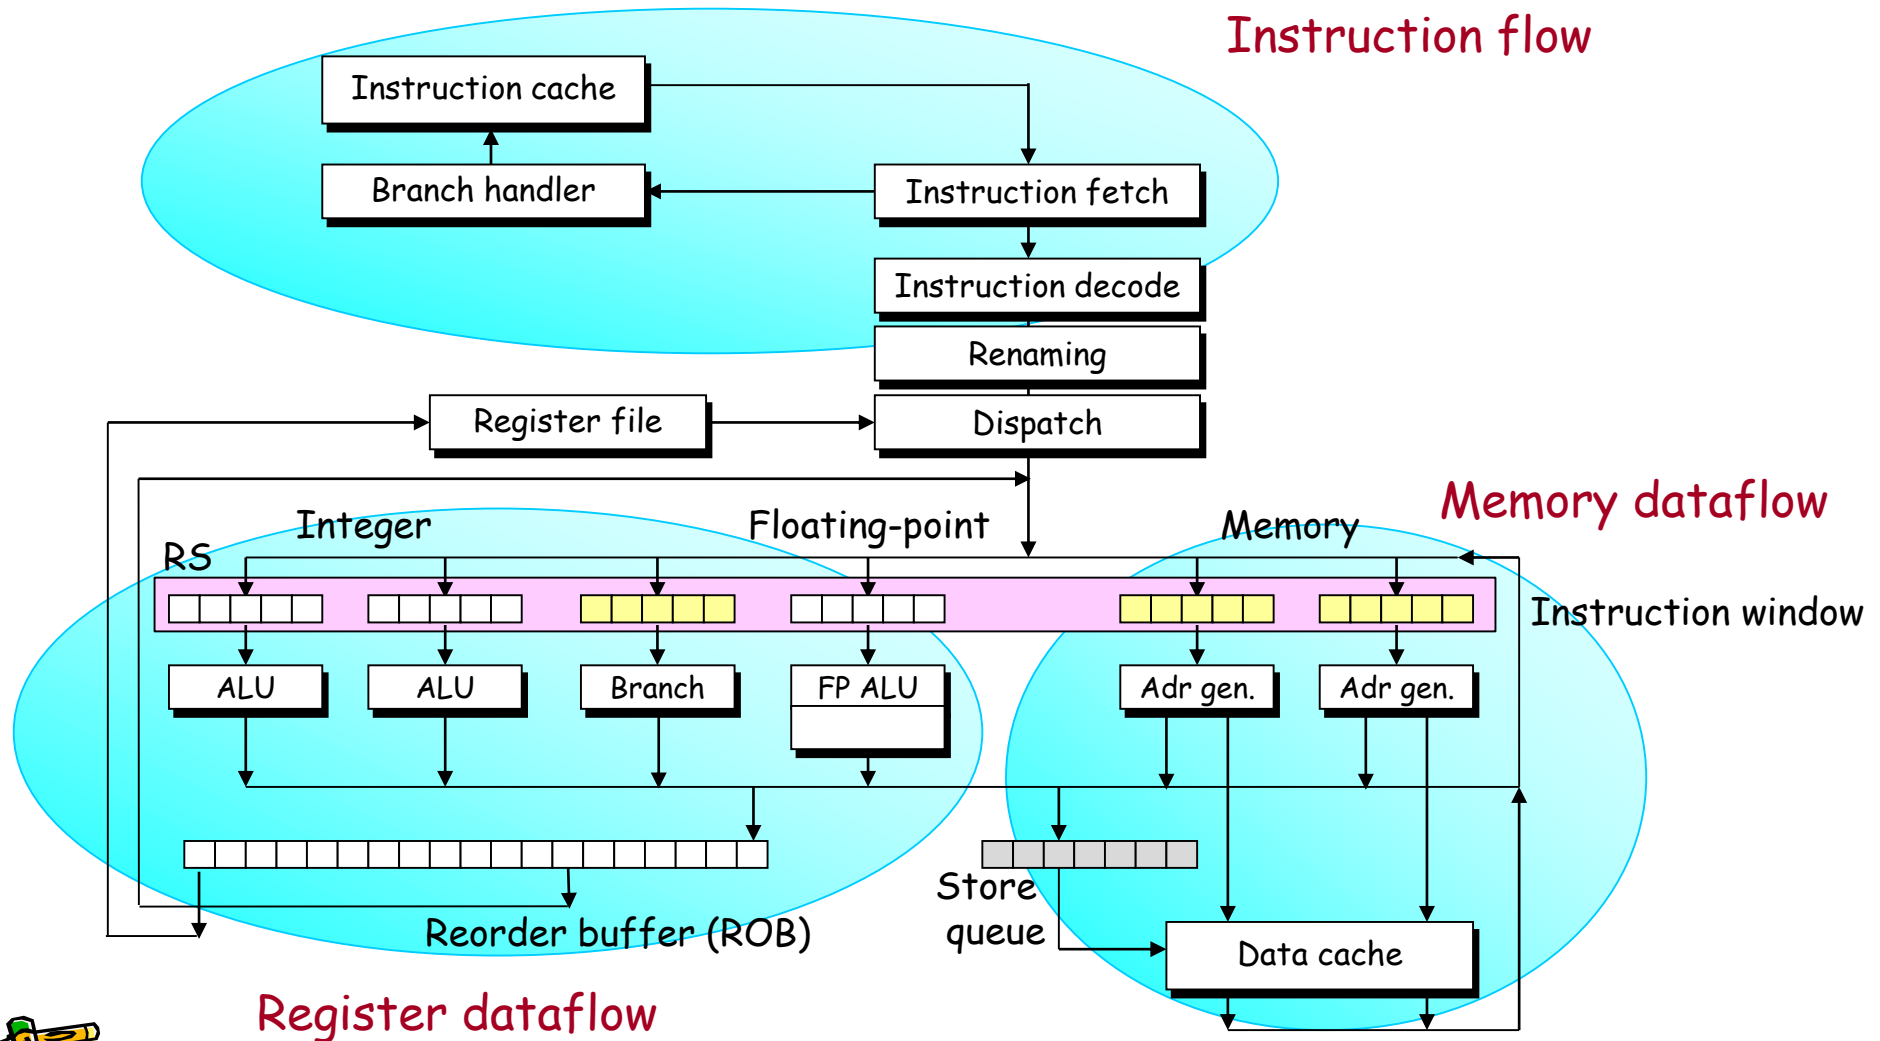

Pollack's Rule



- Pollack's Rule states that microprocessor "performance increase due to microarchitecture advances is roughly proportional to the square root of the increase in complexity". Complexity in this context means processor logic, i.e. its area.



WIKIPEDIA



From multi-core era to many-core era

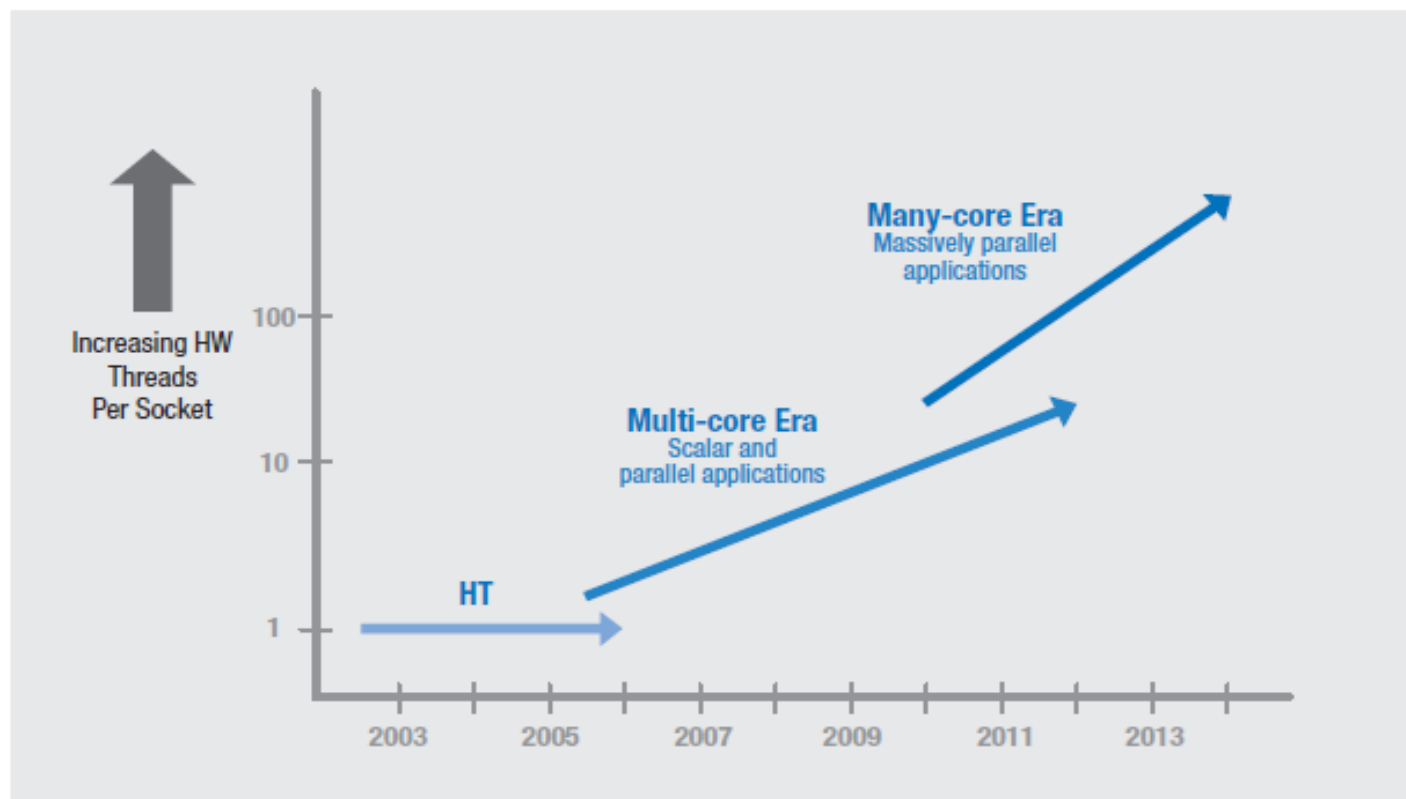



Figure 1: Current and expected eras of Intel® processor architectures

Platform 2015: Intel® Processor and Platform Evolution for the Next Decade, 2005



Multithreading (1/2)

- During a branch miss recovery and access to the main memory by a cache miss, ALUs have no jobs to do and have to be idle.
- Executing **multiple independent threads (programs)** will mitigate the overhead.
- They are called coarse- and fine-grained multithreaded processors having multiple architecture states.

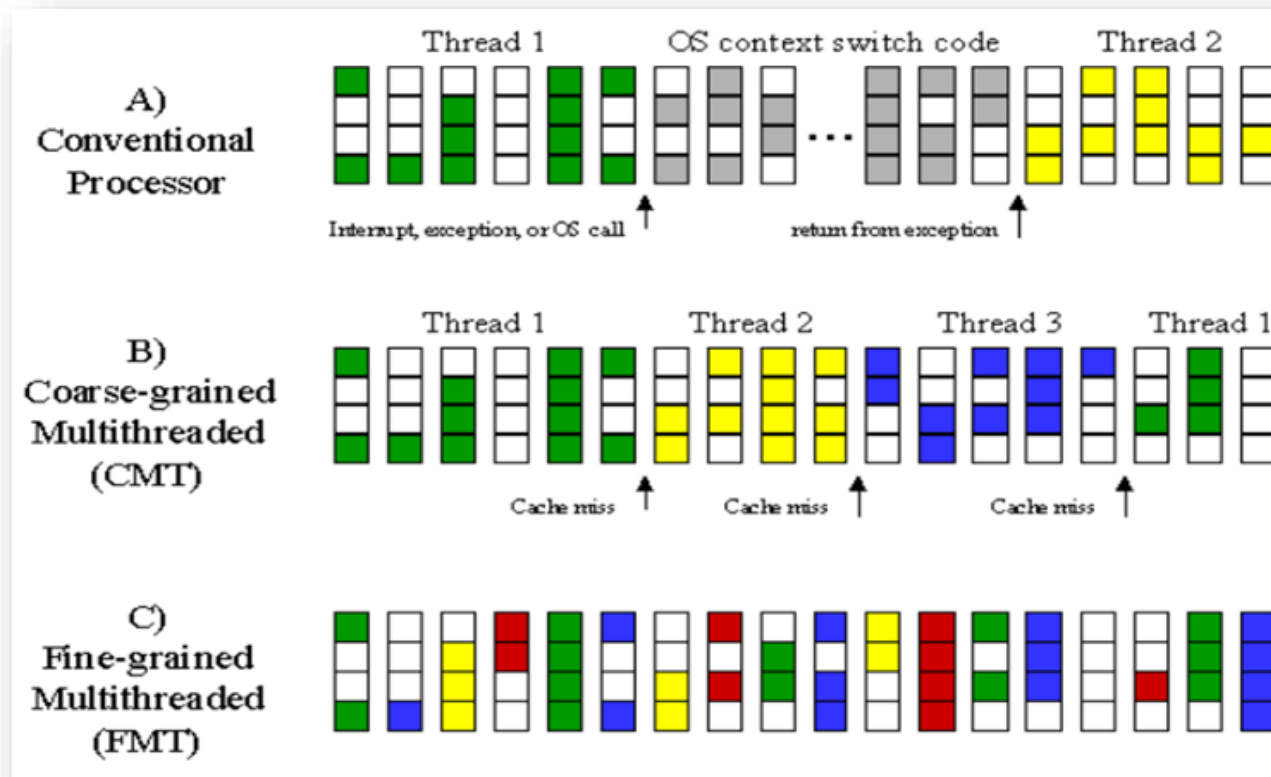

Multithreading (2/2)

- Simultaneous Multithreading (SMT) can improve hardware resource usage.

